



conische tandwielen met spiraalvertanding

pignons coniques spiroïdaux

staal / acier: (C43)

1 : 1





module	Z*	De	Dp	A	F	Dn	D1	dm	L	Lm	Kg
2,0	16	34,6	32,0	19,9	9	25	10	29	16,9	9,5	0,06
	20	42,6	40,0	24,9	12	32	10	36	21,7	12,0	0,14
	25	52,6	50,0	27,4	14	40	12	42	24,8	12,0	0,25
	30	62,6	60,0	29,9	16	50	12	48	26,9	13,0	0,42
2,5	16	43,2	40,0	24,8	10	32	12	37	21,8	13,0	0,13
	20	53,3	50,0	30,2	12	40	12	46	26,7	16,0	0,27
	25	65,8	62,5	33,2	15	50	15	53	29,9	16,0	0,47
	30	78,3	75,0	35,0	18	55	15	59	31,8	16,0	0,69
3,0	16	51,9	48,0	29,4	12	40	15	44	25,8	16,0	0,23
	20	63,9	60,0	34,5	18	45	15	51	30,7	13,5	0,41
	25	78,9	75,0	37,5	20	55	15	60	33,7	16,0	0,72
	30	93,9	90,0	39,5	22	60	20	68	35,8	19,0	0,99
3,5	16	60,2	56,0	34,1	14	45	15	51	29,5	17,5	0,36
	20	74,2	70,0	35,9	15	55	15	59	31,2	19,0	0,62
	25	91,7	87,5	40,5	21	65	20	68	36,5	18,0	1,11
	30	109,2	105,0	41,9	24	70	20	76	37,0	17,0	1,64
4,0	16	68,8	64,0	36,0	15	50	15	56	30,8	17,0	0,51
	20	84,8	80,0	37,5	17	60	18	64	32,5	18,0	0,81
	25	104,8	100,0	40,4	21	70	20	74	35,2	18,0	1,33
	30	124,8	120,0	43,2	25	80	25	84	38,1	16,0	2,10
4,5	16	77,4	72,0	39,3	15	55	18	63	33,5	18,5	0,67
	20	95,4	90,0	42,8	20	65	20	72	36,5	18,0	1,14
	25	117,9	112,5	45,0	25	75	20	82	39,0	18,0	1,87
	30	140,4	135,0	48,0	28	90	25	94	42,0	17,0	2,98
5,0	16	86,0	80,0	41,9	17	60	20	68	35,5	18,0	0,88
	20	106,0	100,0	44,7	21	70	20	78	37,7	18,5	1,47
	25	131,0	125,0	47,8	26	90	20	90	41,8	18,5	2,67
	30	156,0	150,0	52,5	32	110	30	103	45,7	18,0	4,25

conische tandwielen met spiraalvertanding

pignons coniques spiroïdaux

staal / acier: (C43)

1 : 2





module	Z*	De	Dp	A	F	Dn	D1	dm	L	Lm	Kg
2,0	16	36,6	32	22,5	10	27	10	45	21,0	11,7	0,09
	32	65,0	64	24,1	10	40	12	35	21,5	10,0	0,32
2,5	16	45,7	40	27,5	12	34	12	56	25,1	14,5	0,17
	32	81,3	80	29,2	12	50	15	43	25,9	15,0	0,57
3,0	16	54,1	48	28,4	15	40	15	62	25,2	12,0	0,25
	32	97,5	96	34,6	15	60	15	51	29,8	15,0	1,03
3,5	16	63,2	56	33,3	18	48	15	72	30,8	14,0	0,42
	32	113,8	112	39,1	18	70	20	58	34,1	19,0	1,51
4,0	16	72,2	64	36,2	20	50	20	81	32,2	13,5	0,52
	32	130,0	128	44,2	20	80	20	66	38,7	23,0	2,21
4,5	16	81,2	72	40,2	22	60	20	91	35,3	16,0	0,80
	32	146,2	144	49,2	22	80	25	74	42,4	24,0	2,88
5,0	16	90,2	80	50,0	25	60	20	106	45,3	21,0	1,16
	32	162,5	160	53,7	25	85	25	81	46,8	27,0	2,79

conische tandwielen met spiraalvertanding

pignons coniques spiroïdaux

staal / acier: (C43)

1 : 3





module	Z*	De	Dp	A	F	Dn	D1	dm	L	Lm	Kg
2,0	16	37,1	32	25,6	15	25	12	59	24,0	9,7	0,09
	48	96,6	96	25,2	15	50	15	36	21,4	13,0	0,62
2,5	16	46,4	40	27,7	18	33	14	70	26,2	8,9	0,17
	48	120,8	120	31,4	18	60	20	45	26,3	16,0	1,19
3,0	16	54,8	48	29,8	18	42	15	84	28,1	11,0	0,29
	48	145,0	144	36,6	18	65	20	54	31,1	19,0	1,91
3,5	16	64,0	56	36,8	22	48	15	99	33,9	13,6	0,48
	48	169,1	168	43,1	22	75	20	63	36,0	23,0	2,31
4,0	16	73,1	64	41,7	25	55	20	113	39,2	15,5	0,70
	48	193,3	192	49,2	25	85	22	72	40,9	27,0	4,21
4,5	16	82,2	72	53,7	28	60	20	134	50,2	24,0	1,14
	48	217,4	216	56,2	28	90	25	82	47,6	27,0	7,03
5,0	16	91,4	80	60,4	35	60	20	146	57,2	22,7	1,45
	48	241,6	240	63,6	35	100	28	91	53,6	35,0	8,42

conische tandwielen met spiraalvertanding

pignons coniques spiroïdaux

staal / acier: (C43)

1 : 4

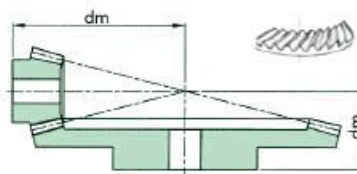

module	Z*	De	Dp	A	F	Dn	D1	dm	L	Lm	Kg
2,0	16	37,3	32	24,0	15	25	12	73	23,1	8,2	0,09
	64	128,5	128	27,2	15	70	20	39	23,3	14,0	1,30
2,5	16	46,7	40	31,0	18	34	15	93	29,1	12,2	0,20
	64	160,6	160	34,2	18	80	20	49	29,2	16,0	2,59
3,0	16	55,1	48	32,1	20	40	15	108	30,2	11,0	0,31
	64	192,7	192	40,9	20	90	20	59	35,1	22,0	3,94